

1 2 3 4 5 6 7

更改 REV	出图日期 DATE	设变内容 MODIFICATION	修改 DRAWN
B	2017/10/12 2017/11/16	5.24台阶减胶变更 取消前端台阶 与线孔增加弧形	Zach

A

B

C


D

A

B

C

D

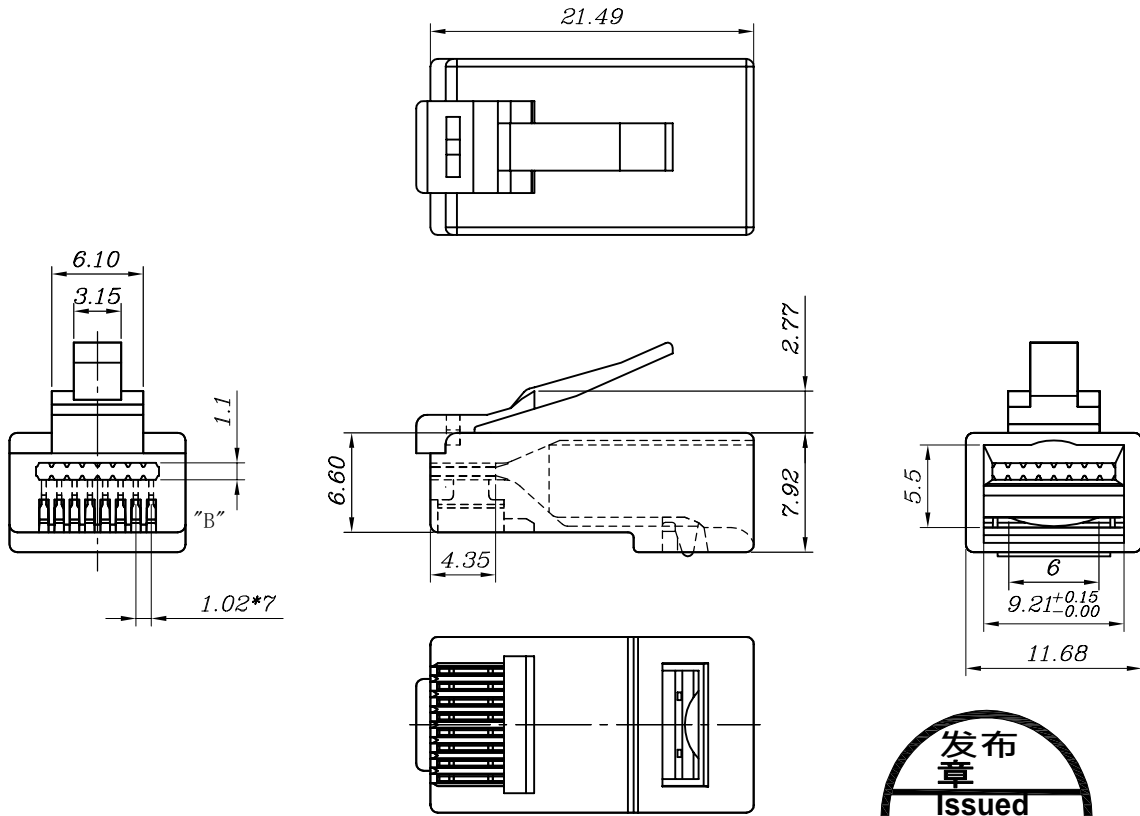

SPECIFICATIONS

1.ELECTRICAL:
UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 VOLTS AC. 60 SEC.
INSULATION RESISTANCE: 500 MΩ.
CONTACT RESISTANCE: 20mΩ MAX.

2.MECHANICAL:
STRAIN RELIEF: 20POUND MIN.
DURABILITY: 1200 MATING CYCLES.

3.MATERIAL:
HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
GOLD PLATING: 3u"-50u", ARE AVAILABLE.

4. USAGE:
SUITABLE FOR STRANDED & SOLID WIRE 23AWG ~ 26 AWG.
(It can be used for the wire OD from Ø 0.93 ~ Ø1.04)



BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC
Drawing									
Mark					✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark		

DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材质 MATERIAL PC	图号 DWG NO.
.X±0.20	.X°±5°	名称 TITLE	
.XX±0.10	.XX°±2°	制图 DRAWN CathyLi	比例 SCALE 2/1
APPROVAL 审	核 对 CHECKED 钟均江	张数 SHEET 1/1	更改 REV B