



RoHS compliant

RevNo	Revision note	Date	Signature	Checked
-------	---------------	------	-----------	---------

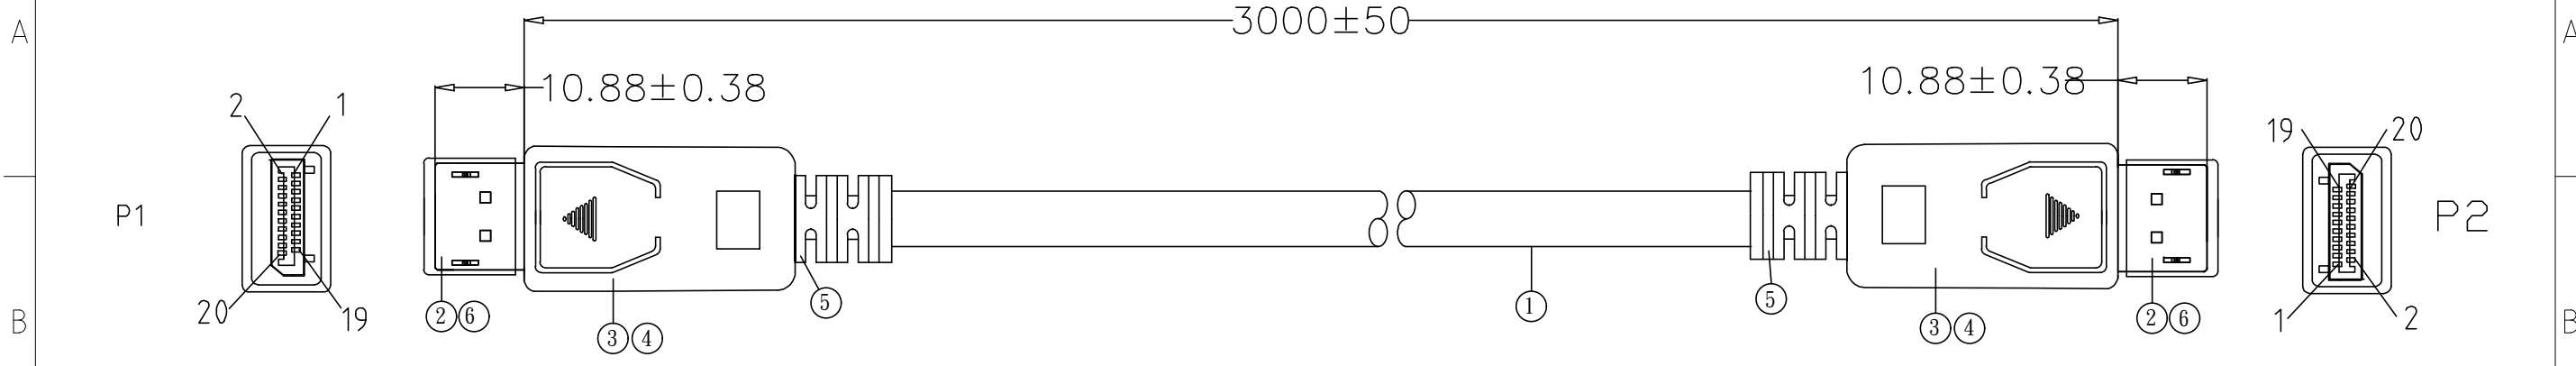

**Electronic Tests:**

- A. Open/Short/Intermittence: 100%
- B. HI-POT:AC 150V 0.01S 1mA
- C. Insulation Resistance: DC 200V 0.01S 10M ohm (Min)
- D. Conductive Resistance: 2 ohm (Max)

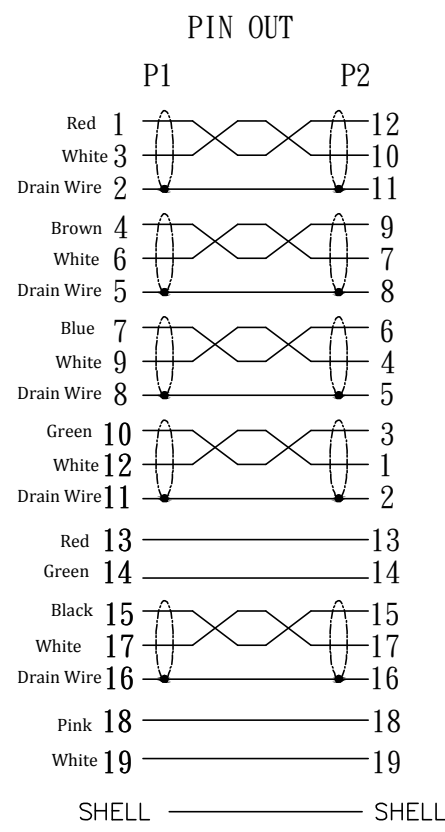

NO	NAME	SPECIFICATIONS	Q' TY	UNIT
⑥	DUST CAP	DISPLAYPORT M LDPE	2	PCS
⑤	MOLDED	45P BLACK PVC	5	G
④	MOLDED	LDPE	3	G
③	OUTER COVER	DISPLAYPORT 20PIN LATCHING MALE CONNECTOR BLACK ABS Assembly TYPE OUTER COVER	2	Set
②	CONNECTOR	DISPLAYPORT 20PIN:BLACK INSULATION, Gold PLATED Pin, Gold PLATED SHELL+#28CABLE CLAMP	2	PCS
①	CABLE	(7/0.127TC*1P+7/0.127TC+FAM)*5+(7/0.127TC) *4C+AL-FOIL+DRAIN WIRE (+(1/0.32BC)+BRAID (96/0.12AL-MG)]black PVC JACKET,OD:7.3± 0.2MM, MARKING:DisplayPort Cable E***** 兄 AWM STYLE 20276 80°C 30V VW-1	3000	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY	Checked by HELEN	Approved by - date October.09.2018	File name Date October.09.2018
ANGLE:	<b>32-2423A</b>		DP MALE TO DP MALE CABLE,BLACK
UNIT:MM			Edition 1
		Sheet 1/1	