



RevNo	Revision note	Date	Signature/Checked
-------	---------------	------	-------------------

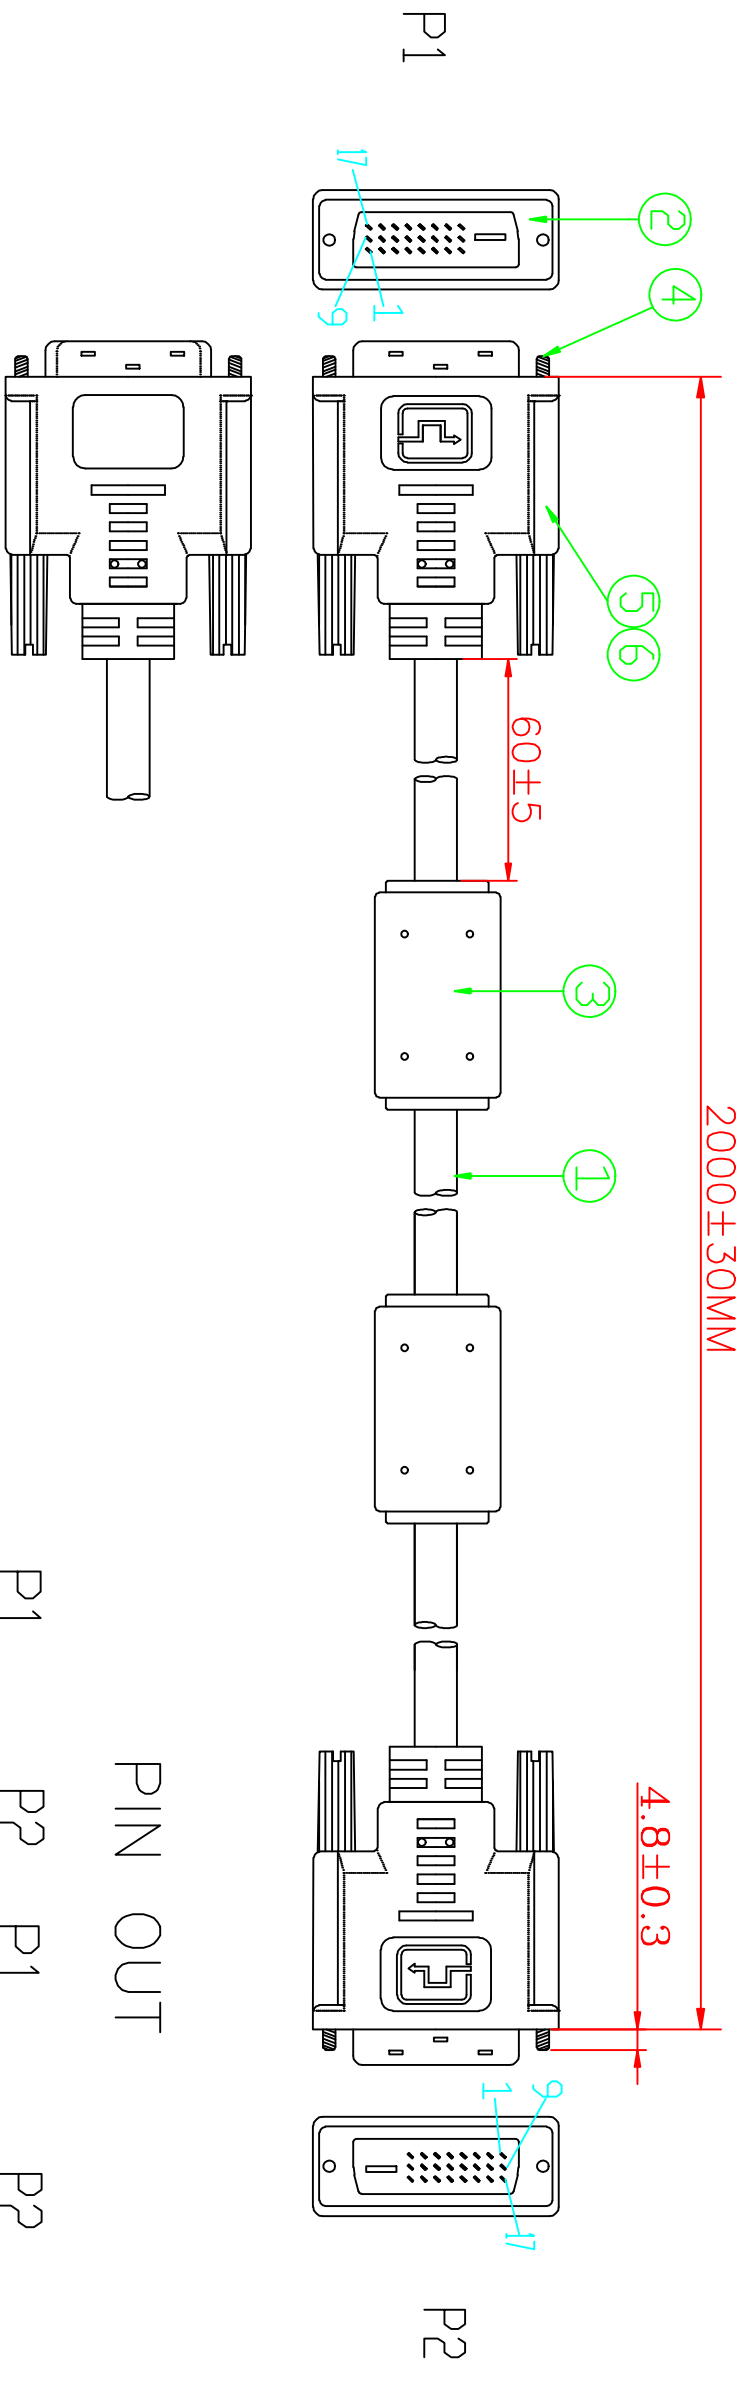

PIN OUT

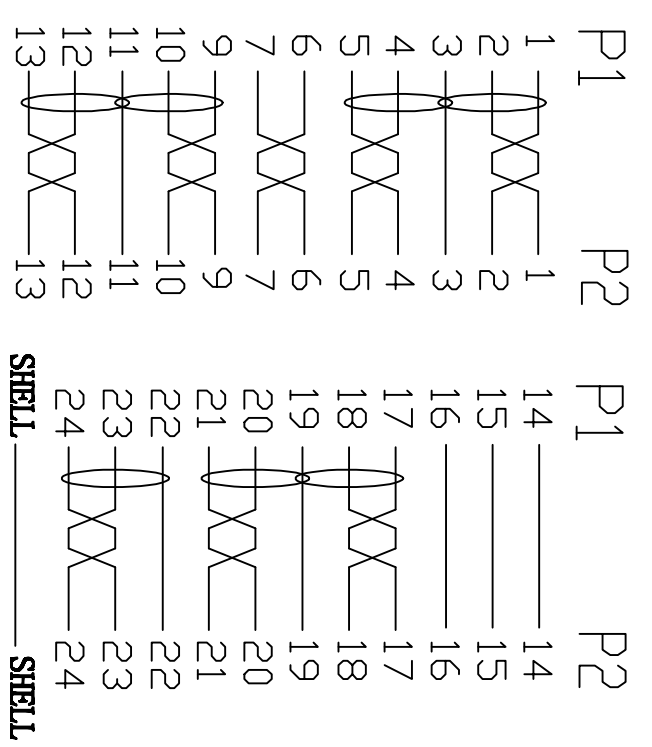

REQUIREMENTS:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	4	PCS
③	FERRITE CORE	F5B:RH14.2*28.5*9.5	2	PCS
②	CONNECTOR	DVI 24+1/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*7C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:7.3±0.15MM	2000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by	Checked by	HELEN	File name
ACHY	Approved by - date	MARCH 6,2012	DVI24+1M/M 2M
ANGLE:			Date
			MARCH 6,2012
UNIT:MM			Scale
			FREE
			DVI 24+1 M-M 30AWG
			32 2800
			Edition
			1
			Sheet
			1/1