



| | | | | |
|-------|---------------|------|-----------|---------|
| RevNo | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|

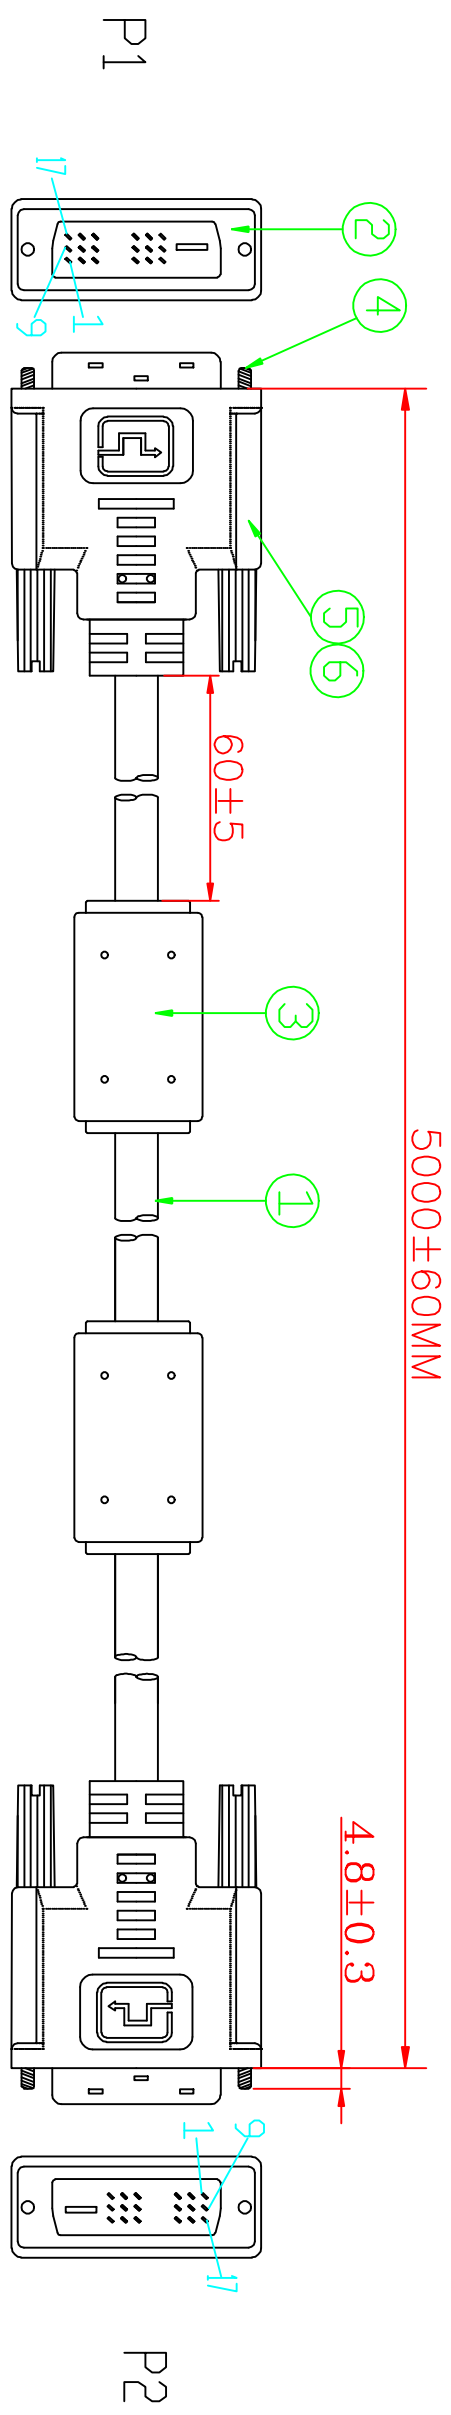

PIN OUT

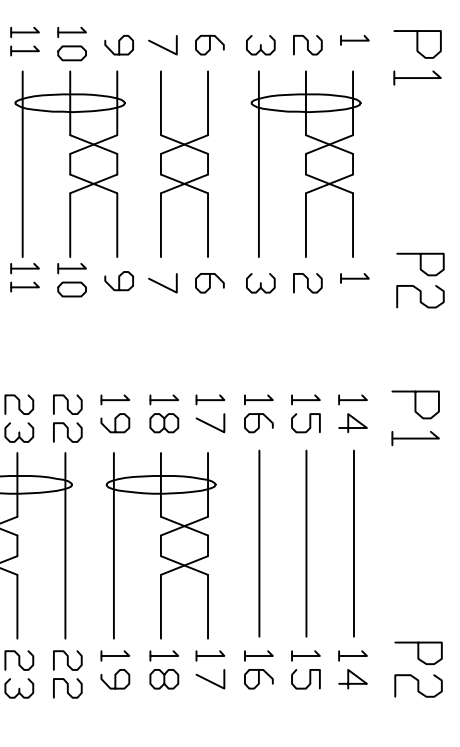

NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

| | | | | |
|-----|--------------|--|-------|------|
| ⑥ | OUTER MOLDED | BLACK 45P PVC | 0.048 | KG |
| ⑤ | INTER MOLDED | LDPE | 0.021 | KG |
| ④ | SCREW | #4-40UNC 2.3*45.5MM,NICKEL PLATED,WITH BLACK PVC | 4 | PCS |
| ③ | FERRITE CORE | F5B:RH12*20*7.3 | 2 | PCS |
| ② | CONNECTOR | DVI 18+1/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN | 2 | PCS |
| ① | CABLE | (1P*30#+FME+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB JACKET:BLACK PVC OD:6.0±0.2MM | 5000 | MM |
| NO. | MATERIAL | DESCRIPTION | QTY. | UNIT |

| | | | | |
|---------------------|----------|---|-----------------------------------|----------------------------|
| Itemref | Quantity | Title/Name,designation,material,dimension etc | | Article No./Reference |
| Designed by ACHY | | Checked by HELEN | Approved by - date OCT 23.2014 | File name DVI18+1M/M 5M |
| ANGLE: | | | | Date OCT 23.2014 |
| UNIT:MM | | | | DVI 24,+1 M-M 30AWG 5M |
| | | | | 32 2807 |
| | | | | Edition 1 |
| | | | | Sheet 1/1 |

