



NOTES:
 1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)
 3:Use testing:1080P

⑥	DUST CAP	HDMI A/M DUST CAP,LDPE	2	PCS
⑤	HOOD	ABS SHELL,COLOR:BLACK	2	PCS
④	OUTER MOLDED	BLACK 45P PVC	0.024	KG
③	INNER MOLDED	LDPE	0.024	KG
②	CONNECTOR	HDMI 19PIN MALE,THE PIN GOLD PLATED,THE SHELL FOR GOLD PLATING	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*5C+4C*30#+ADB JACKET:BLACK PVC,OD:6.0±0.15	2000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

PIN OUT

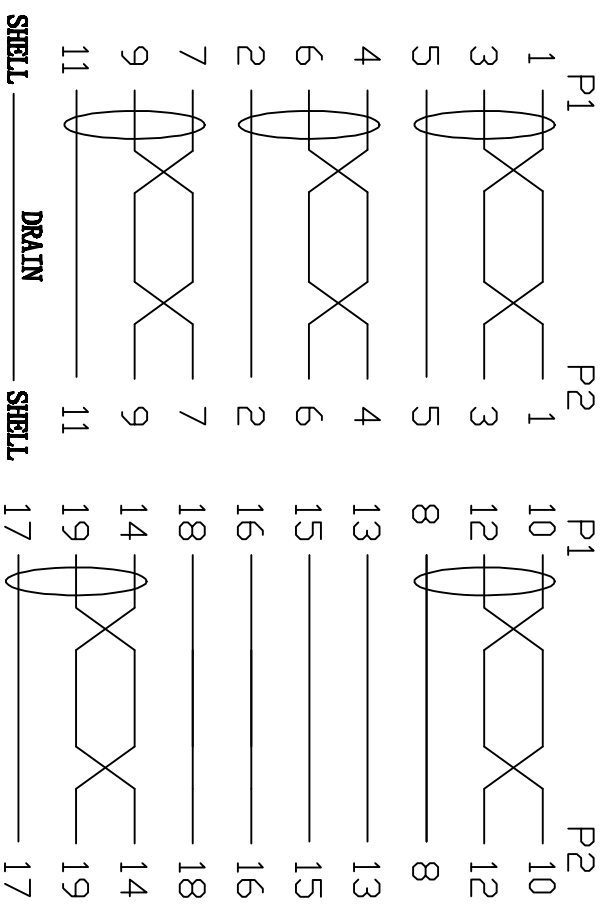

L#emref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
---------	----------	---	-----------------------

Designed by	Checked by	Approved by - date	File name	Date	Scale
		OTC 28.2013	HDMI 14_2M	OTC 28.2013	FREE

ANGLE:		HDMI 1.4 AM-AM 360 DEGREE ROTATION
--------	--	------------------------------------

UNIT:MM		32 3652	Edition	Sheet
			1	1/1