


REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

PIN OUT

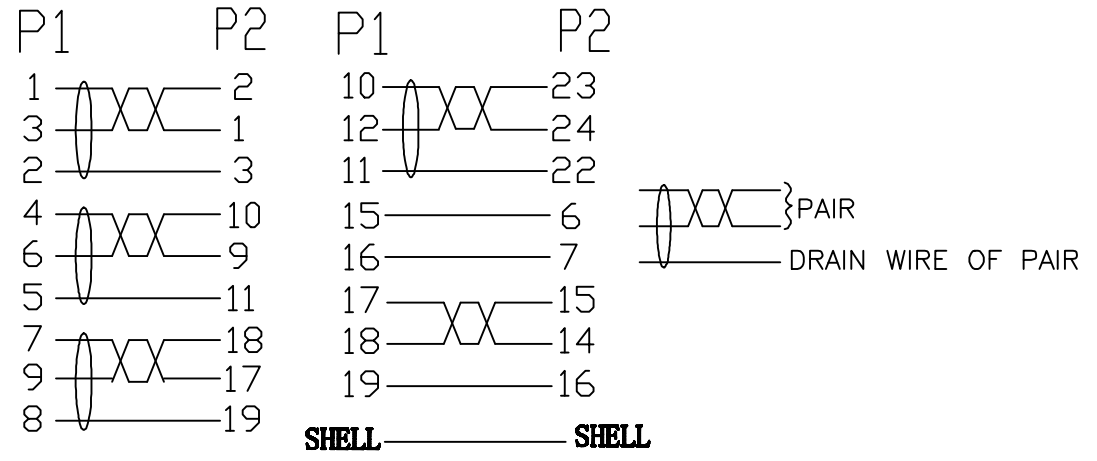

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM, BLACK PVC	2	PCS
③	CONNECTOR	DVI 24+1/MALE, BLACK INSULATOR, GOLD PLATED SHELL, GOLD PLATED PIN	1	PCS
②	CONNECTOR	HDMI A TYPE/MALE, BLACK INSULATOR, GOLD PLATED SHELL, GOLD PLATED PIN	1	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:6.0±0.15MM	1000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name, designation, material, dimension etc		Article No./Reference	
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6.2012	File name L=1M	Date MARCH 6.2012	Scale FREE
ANGLE:		DVI 24+1/M TO HDMI AM			
UNIT:MM		32 3749		Edition 1	Sheet 1/1