



RevNo	Revision note	Date	Signature/Checked
-------	---------------	------	-------------------

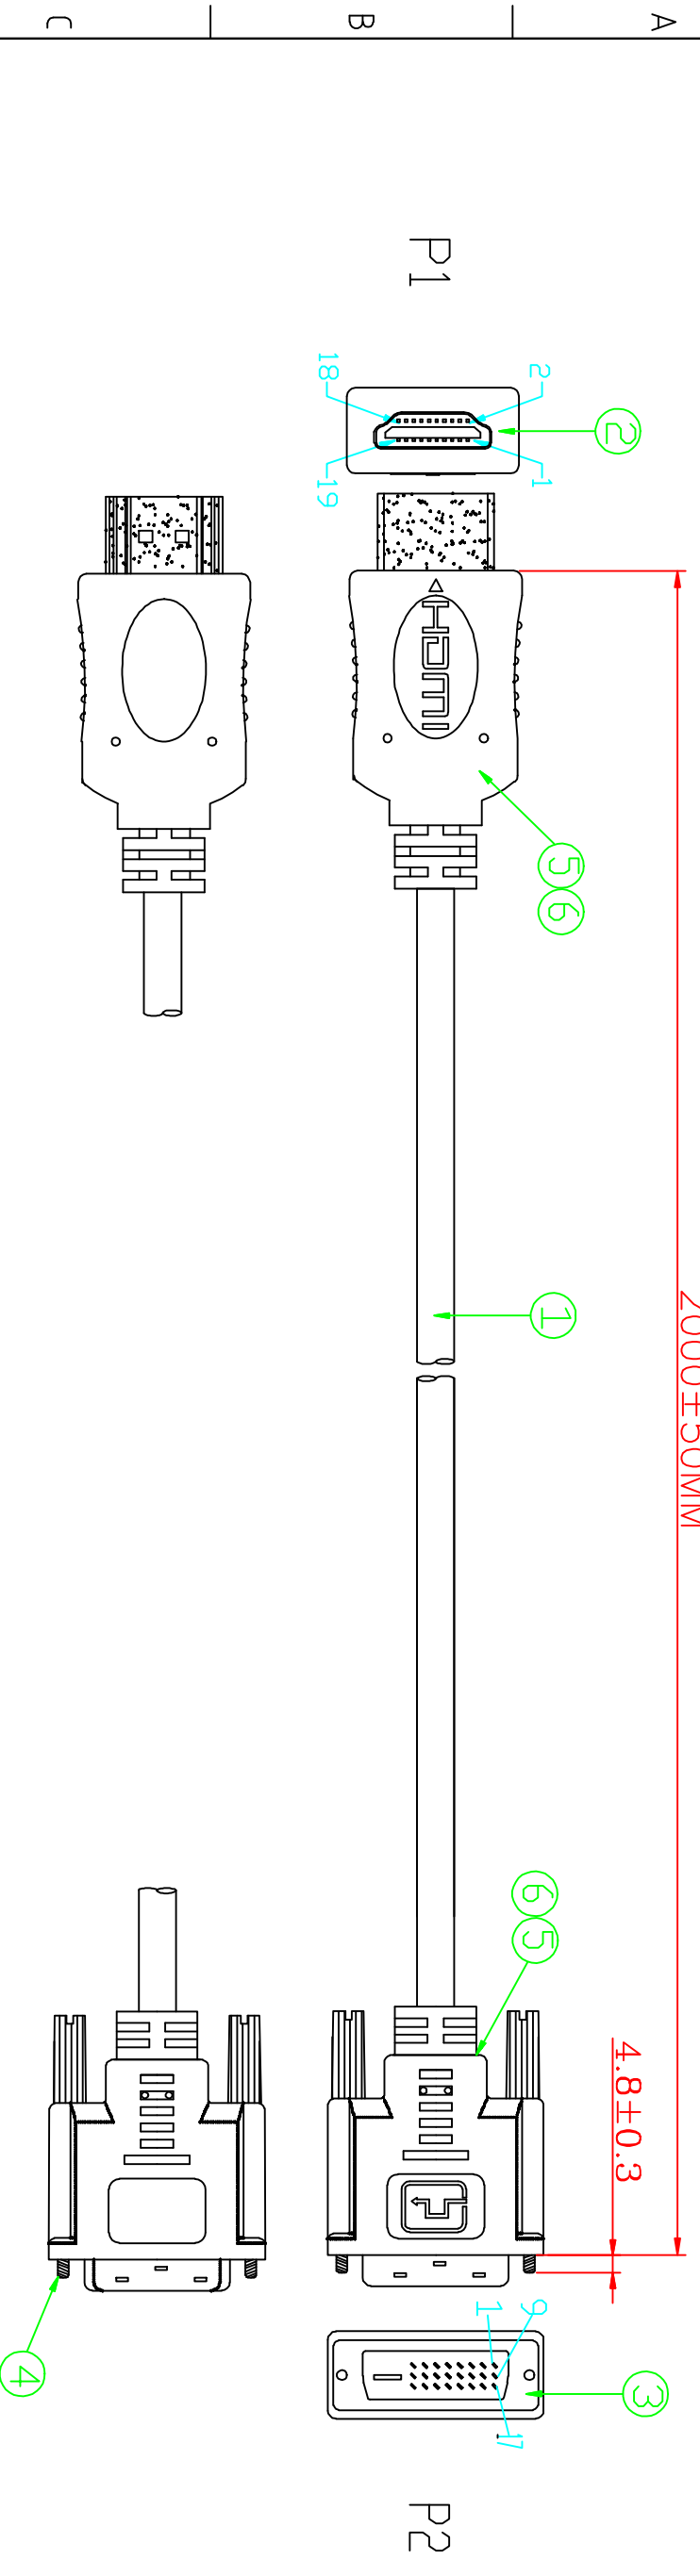

PIN OUT

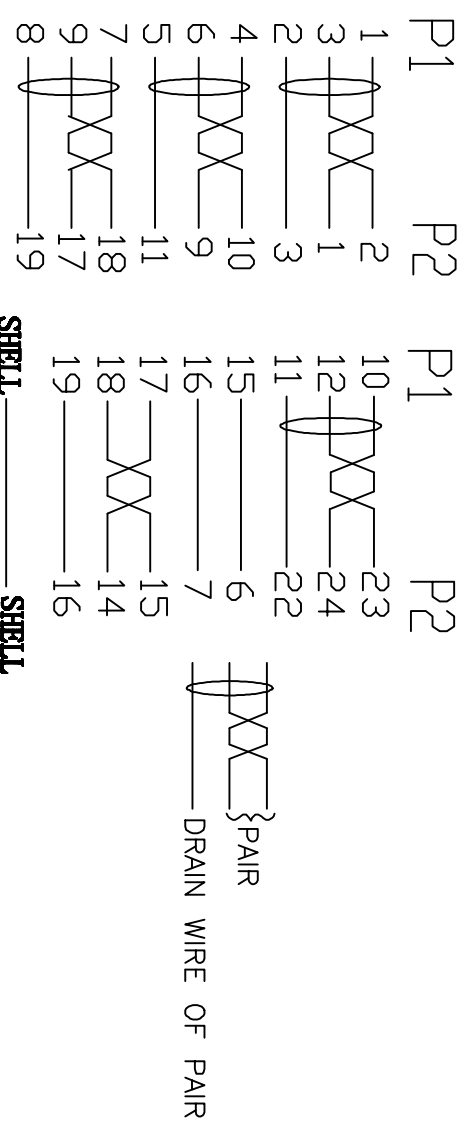

REQUIREMENTS:

1:100% short,open and miss wire test.

2:Insulation resistance:DC300V 10MΩ(Min)
Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	2	PCS
③	CONNECTOR	DVI 24+1/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	HDMI A TYPE/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	(1P*30#+FME+D+AL+MYLAR)*4C+1P*30#+3C*30#+ADB JACKET: BLACK PVC OD:6.0±0.15MM	2000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by ACHY		Checked by HELEN	Approved by - date MARCH 6,2012	File name L=2M	Date MARCH 6,2012
ANGLE:					DVI 24+1/M TO HDMI AM
UNIT:MM					32 3750
					Edition 1
					Sheet 1/1