



RevNo	Revision note	Date	Signature	Checked

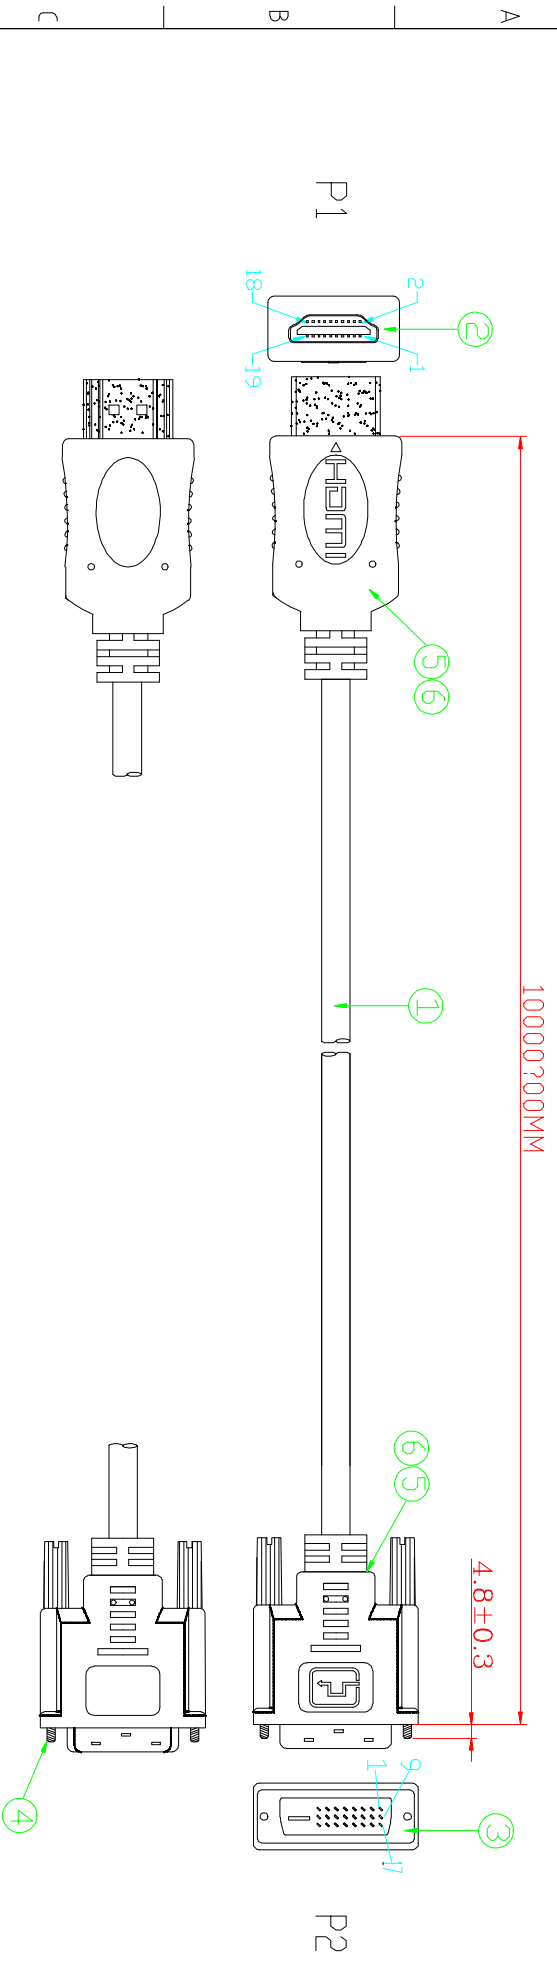

PIN OUT

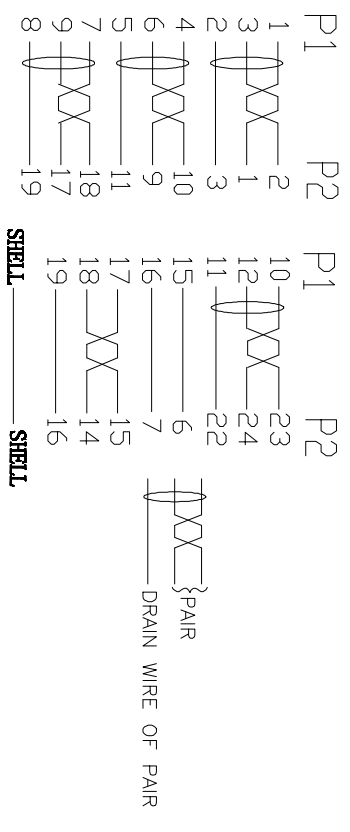

REQUIREMENTS:  
 1:100% short,open and miss wire test.  
 2:Insulation resistance:DC300V 10MΩ(Min)  
 Conduction resistance 5Ω(Max)

⑥	OUTER MOLDED	BLACK 45P PVC	0.048	KG
⑤	INTER MOLDED	LDPE	0.021	KG
④	SCREW	#4-40UNC 2.3*45.5MM,BLACK PVC	2	PCS
③	CONNECTOR	DVI 24+1 /MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	HDMI A TYPE/MALE,BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	(1P*1/0.32BC+1/0.32BC+FAM)*4C+1P*1/0.32BC+3C*1/0.32BC+ADR(96/0.12ALM) OD:7.3 BLACK	10000	MM
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Itemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference
Designed by	HELEN	Checked by	Approved by - date	File name	Date
ANGLE:			Sep.16.2014	L=10M	Sep.16.2014
UNIT:MM				DVI 24+1/M TO HDMI AM	
				32 3754	1
					Sheet
					1/1