


PIN OUT

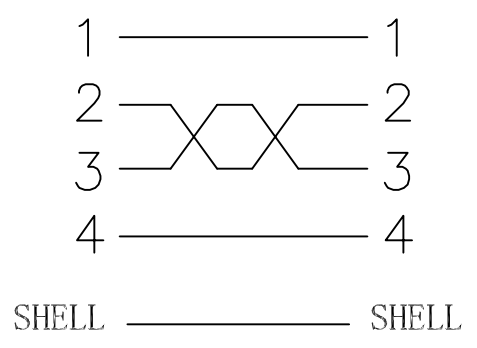

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)  
Conduction resistance 5Ω(Max)

④	OUTER MOLDED	BEIGE 45P PVC	0.021	KG
③	CONNECTOR	USB B TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BEIGE PVC MARKING:AWM STYLE 2725 80℃ 30V VW-1 USB2.0 High Speed Cable-ROHS	1	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6.2012	File name USB AM TO BM L=1M	Date MARCH 6.2012	Scale FREE
			40 4010		
			40 4010	Edition 1	Sheet 1/1