



1	2
CUSTOMER NAME	
CUSTOMER Part No.	68 XXXX

7	8	9	10
DATE	REV	DESCRIPTION	BY
2014.10.22	A/0	NEW	Sally
2014.10.23	A/1	Change the wire description	Sally

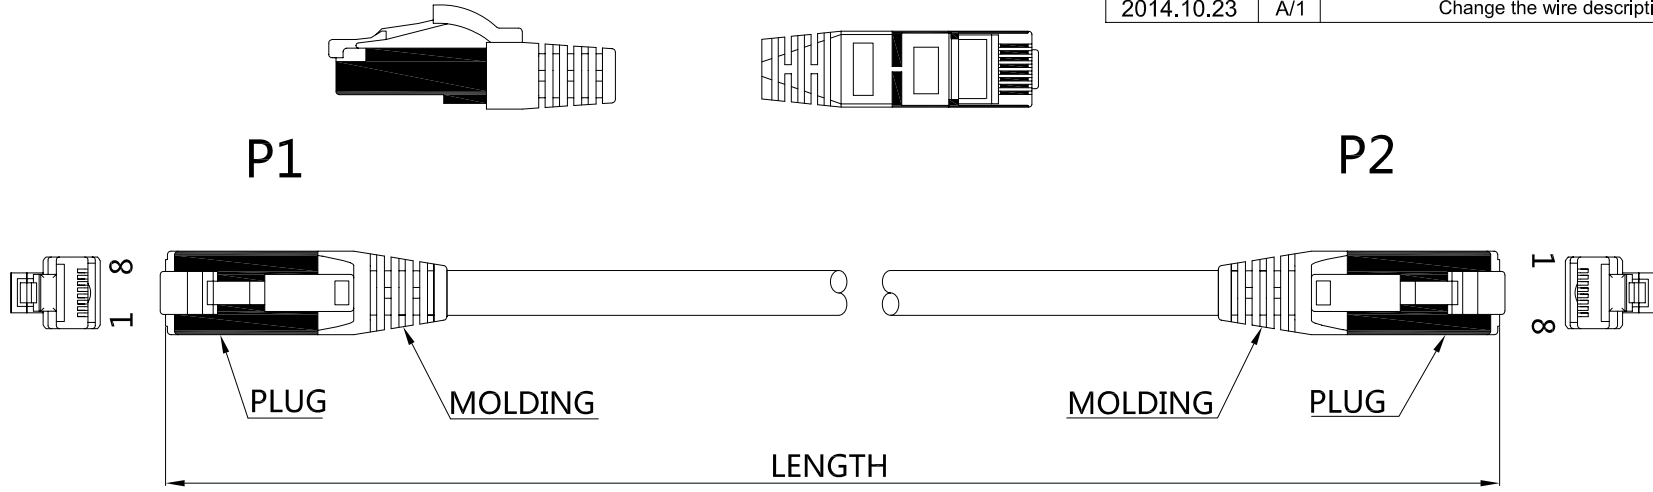

Marking: CAT.6 F/UTP LSOH 26AWGX4P PATCH CONFORM TO ANSI/TIA-568-C.2 & ISO/IEC 11801 (FP0842)ED.2 & EN 50288-6-2 & IEC 60332-1-2

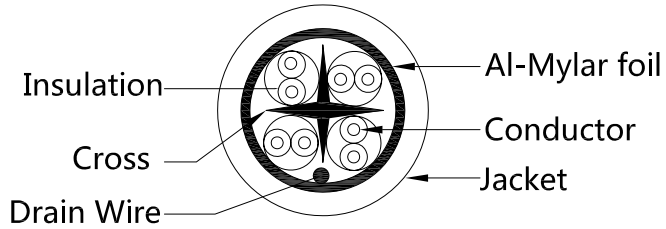

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 26AWG 7/0.16±0.06mm
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.30mm Diameter:0.95±0.06mm
Jacket	LSOH Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:6.0±0.2mm
Wire	CAT.6 F/UTP 26AWG*4P
Plug	YUS-28 8P8C Gold Flush
Length	XX
Color	XX

Key Size	△	3RD	⊕	⊖
Length	Tolerance			
(mm)	Critical	Normal	General	
0-15	±0.05	±0.10	±1.0	
15-60	±0.10	±0.20	±1.5	
60-150	±0.15	±0.35	±2.0	
150-350	±0.20	±0.50		
350-1000	±0.40	±0.65		

Part No.	68 XXXX		
Description	CAT.6 F/UTP 26AWG*4P LSOH YUS-28 L-946		
UNIT	mm	APPROVAL	CHECKER
PAGE	1/1	2014.10.23	2014.10.23
Draw.No.		單體	蔡秀云
			DRAWER
			Sally