
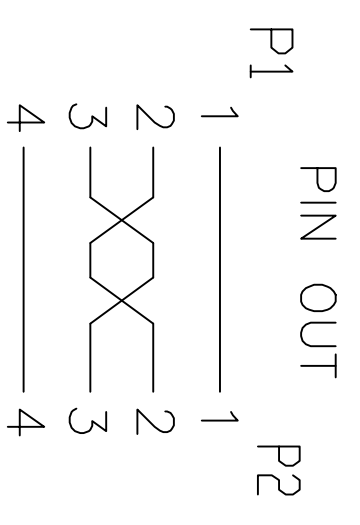


RevNo	Revision note	Date	Signature/Checked
-------	---------------	------	-------------------

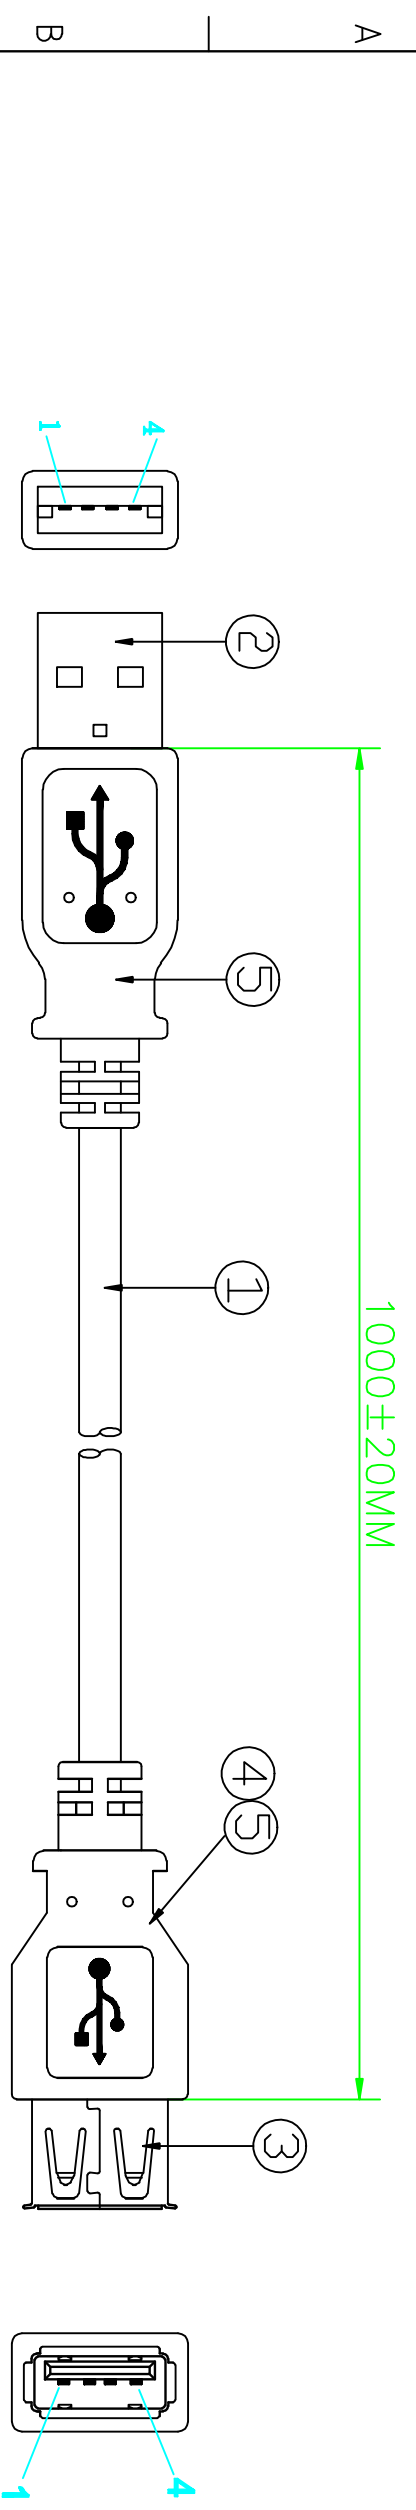

**REQUIREMENTS:**

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)
- Conduction resistance 5Ω(Max)

⑤	OUTER MOLDED	BLACK 45P PVC	0.021	KG
④	INTER MOLDED	LDPE	0.008	KG
③	CONNECTOR	USB A TYPE FEMALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80t 30V VW-1 USB2.0 High Speed Cable-ROHS	1	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Item ref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference
Designed by ACHY		Checked by HELEN	Date MARCH 6,2012
		Approved by - date MARCH 6,2012	File name USB AM TO AF L-IM
			Date MARCH 6,2012
			Scale FREE

USB1000BK		Edition	Sheet
USB1000BK		1	1/1