


PIN OUT

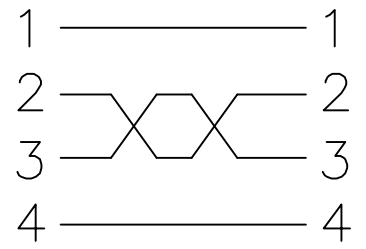

SHELL ———— SHELL

REQUIREMENTS:

- 1:100% short,open and miss wire test.
- 2:Insulation resistance:DC300V 10MΩ(Min)  
Conduction resistance 5Ω(Max)

④	OUTER MOLDED	BLACK 45P PVC	0.021	KG
③	CONNECTOR	USB B TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
②	CONNECTOR	USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN	1	PCS
①	CABLE	USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80℃ 30V VW-1 USB2.0 High Speed Cable-ROHS	0.5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ACHY	Checked by HELEN	Approved by - date MARCH 6.2012	File name USB AM TO BM L=0.5M	Date MARCH 6.2012	Scale FREE
			USB2008BK		
USB2008BK				Edition 1	Sheet 1/1