
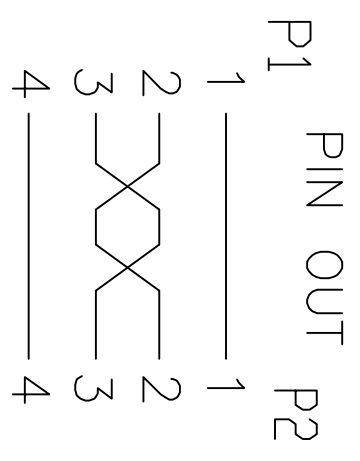


| | | | | |
|-------|---------------|------|-----------|---------|
| RevNo | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|

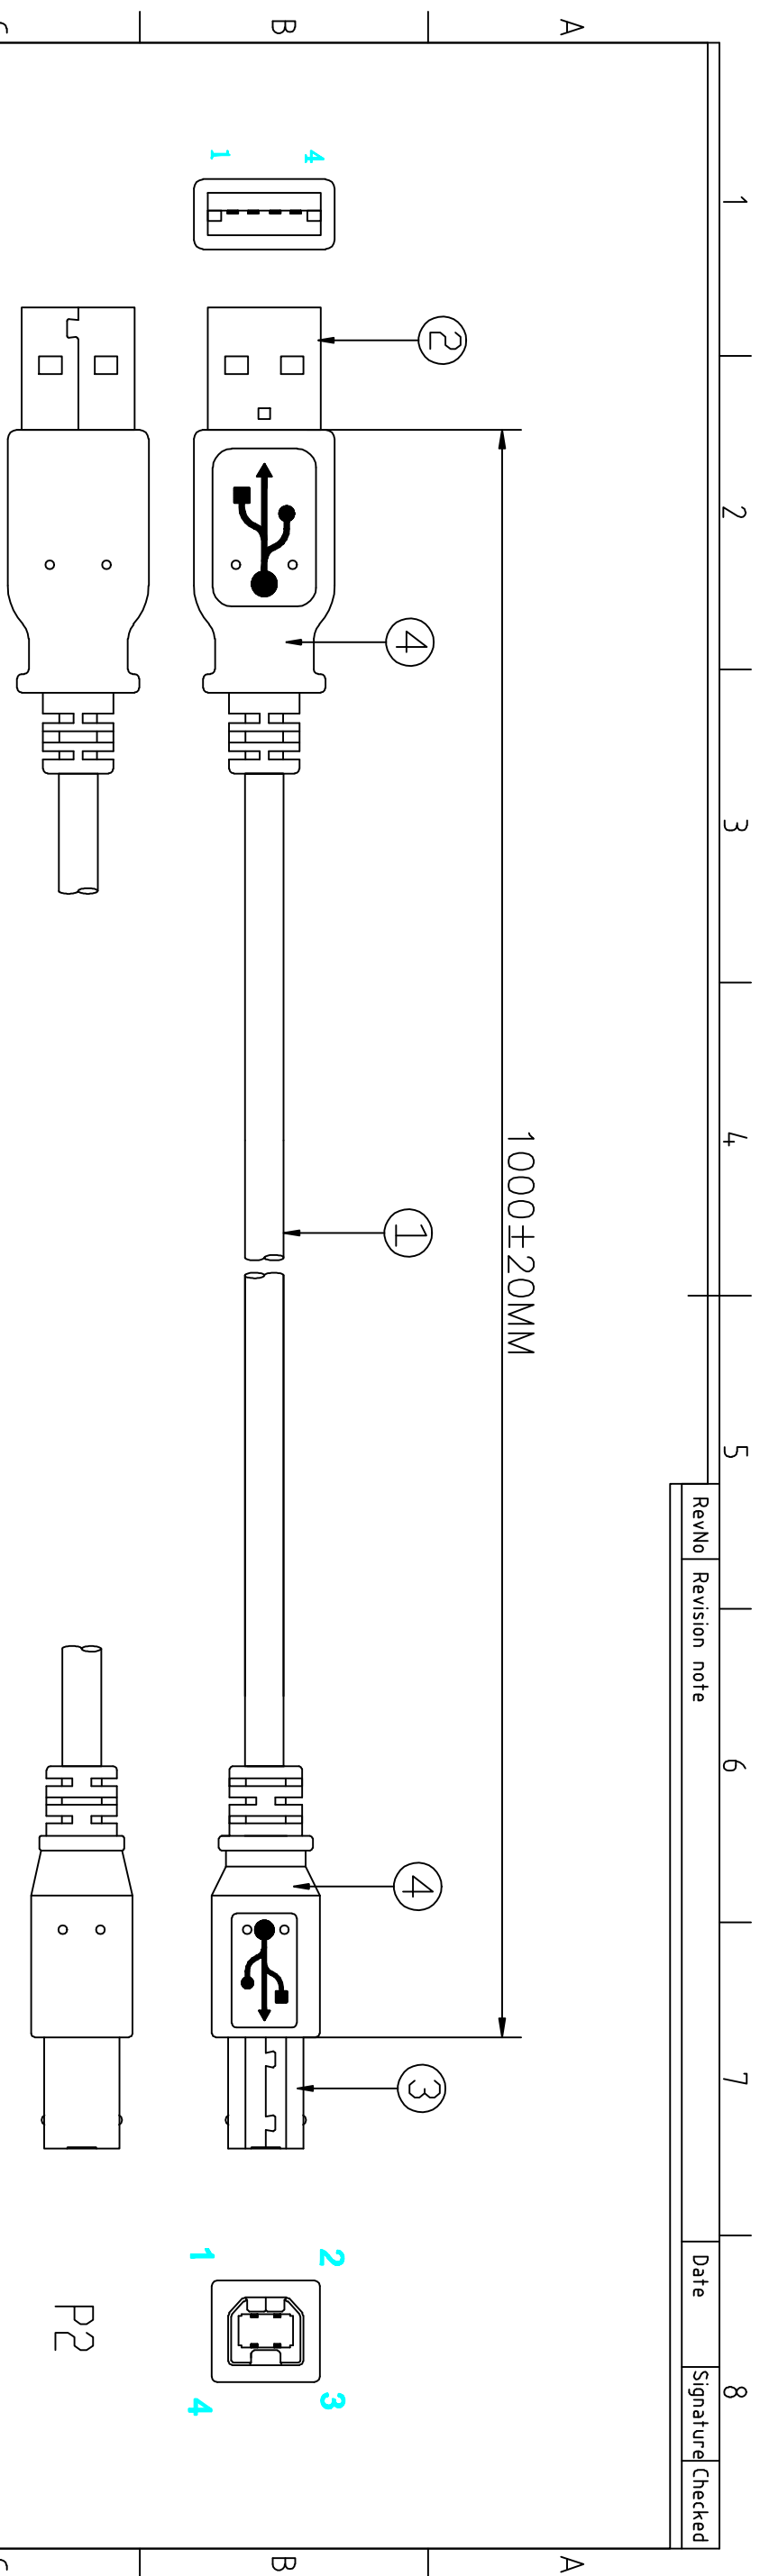

SHELL _____ SHELL

| | | | | |
|-----|--------------|--|-------|------|
| ④ | OUTER MOLDED | BLACK 45P PVC | 0.021 | KG |
| ③ | CONNECTOR | USB B TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ② | CONNECTOR | USB A TYPE MALE,WHITE INSULATOR,NICKEL PLATED SHELL,GOLD PLATED PIN | 1 | PCS |
| ① | CABLE | USB2.0 1P*28#+2C*28#+AB OD:3.9±0.1 JACKET:BLACK PVC MARKING:AWM STYLE 2725 80° 30V VW-1 USB2.0 High Speed Cable-ROHS | 1 | M |
| NO. | MATERIAL | DESCRIPTIONG | QTY. | UNIT |

1:100% short,open and miss wire test.
 2:Insulation resistance:DC300V 10MΩ(Min)
 Conduction resistance 5Ω(Max)

REQUIREMENTS:

| | | | |
|---------------------|---------------------|---|--|
| Itemref | Quantity | Title/Name,designation,material,dimension etc | Article No./Reference |
| Designed by ACHY | Checked by HELEN | Approved by - date MARCH 6,2012 | File name USB AM TO BM L=™ Date MARCH 6,2012 Scale FREE |
| USB2009BK | | | Edition 1 Sheet 1/1 |