


Item NO.	L/(MM)	T/(MM)
USB2048BK	500	10
USB2049BK	1000	20
USB2050BK	2000	30
USB2052BK	3000	50

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTENCE: 100%.
- 2.INSULATION RESISTANCE:DC300V 0.01S 5MΩ(MIN)
- 3.CONDUCTIVE RESISTANCE:5 OHM (MAX)
- 4.RoHS & REACH COMPLIANT

PIN OUT

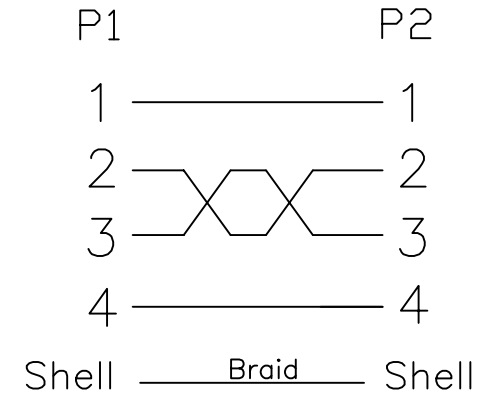

NO.	MATERIAL	DESCRIPTION	QTY.	UNIT
③	MOLDED	45P BLACK PVC		G
②	CONNECTOR	USB2.0 A Male The Pin GOLD PLATED,WHITE INSULATION, NICKEL PLATED SHELL.	2	PCS
①	CABLE	7/0.12BC*1P+7/0.12BC*2C+A+B(48/0.12AL-MG) + BLACK PVC, OD:4.0±0.2mm MARKING:AWM STYLE 2725 80℃ 30V USB 2.0 High Speed Cable	L	MM

Ltemref	Quantity	Title/Name,designation,material,dimension etc	Article No./Reference		
Designed by ALVIN	Checked by HELEN	Approved by - date 28-02-2020	File name	Date 28-02-2020	Scale FREE
ANGLE:	USB2.0 Cable AM TO AM,BLACK			Edition 1	Sheet 1/1
UNIT:MM					